
**ROHS COMPLIANT** 

## PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
01	PRELIMINARY	04/17	STW	

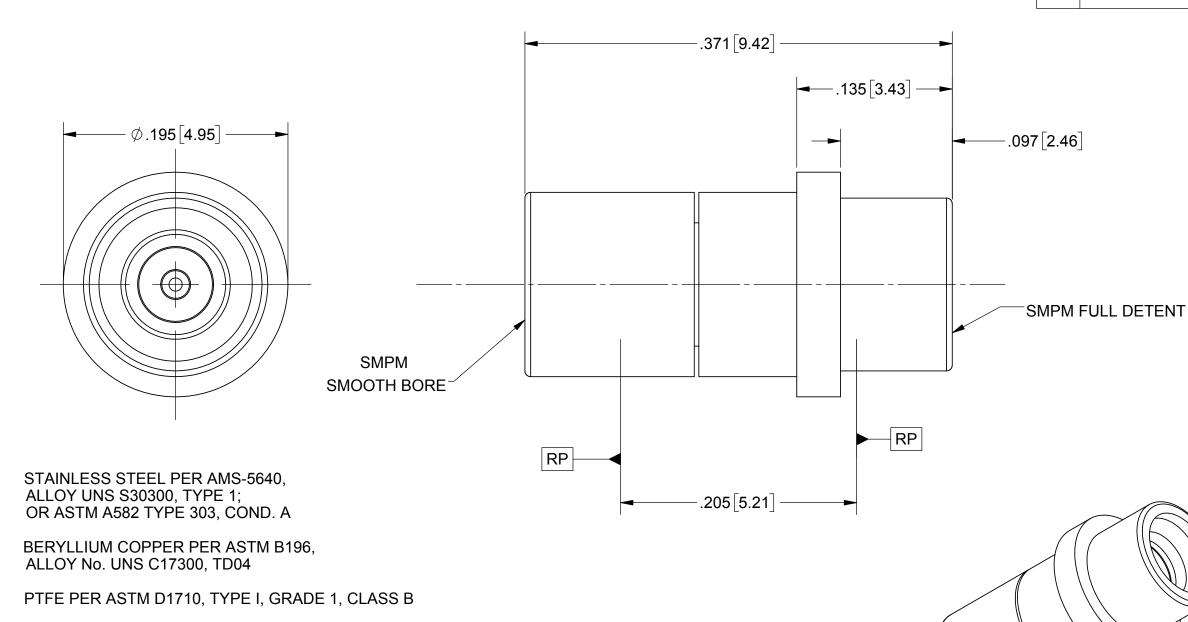

FINISH:

**MATERIAL**:

**BODIES**:

CONTACT:

**INSULATOR:** 

BODY: PASSIVATED PER AMS-2700

CONTACT: GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL

PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

**PERFORMANCE:** 

IMPEDANCE: 50 OHMS

MATERIAL:	SEE NOTES		
FINISH:	SEE NOTES		
SURFACE ARI	<sup>EA:</sup> N/A		
PROPRIETARY			
IS THE SOLE PI ANY REPRODU WITHOUT THE	TION CONTAINED IN THIS DRAW ROPERTY OF SV MICROWAVE, I ICTION IN PART OR AS A WHOLE WRITTEN PERMISSION OF E, INC IS PROHIBITED.		

NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:		
	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0 X°X' +15'		
NOTES	DECIMAL: .X ±.030 .XX +.010		
1	.XXX ±.005		
1	INTERPRET DIMENSIONS AND TOLERANCE		
TARY	PER ASME Y14.5M - 1994		
NED IN THIS DRAWING SV MICROWAVE, INC.	THIRD ANGLE PROJECTION		
PT OD AS A WHOLE	4 1		

VAINOLO.	UNLESS OTHERWISE SPECIFIED
X° ±1°0' X°X' ±15'	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 F. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SUFFACE ROUGHNESS 63-MIL-STD-10.
ERANCES	6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS

APPROVED:

2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES 005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: SO ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R. 7) REMOVE ALL BURRS		
DRAWN:	TMW 04/03/17	Ļ
CHECKED:	STW 04/03/17	٦ ٥

STW 04/03/17



SMPM FD TO SMPM SB **ADAPTOR** 

	95077	DWG. NO.	SF1132	2-6067
S	CALE: 12:1			SHEET 1 OF