


REV. 1 7/9/92

|                 |                |
|-----------------|----------------|
| COIL: @ 25°C    |                |
| RESISTANCE      | 600 OHMS ± 10% |
| NOMINAL VOLTAGE | 26.5 VDC       |
| MUST OPERATE    | 13.0 VDC       |
| MUST RELEASE    | 1.5 VDC        |

|              |                             |
|--------------|-----------------------------|
| ENVIRONMENT: |                             |
| VIBRATION    | 10 CPS TO 2000 CPS @ 20 g's |
| SHOCK        | 100 g's 6 ± 1 MS. DURATION  |
| TEMPERATURE  | -65 °C TO +125 °C           |

NOTES: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

CUSTOMER DATA SHEET

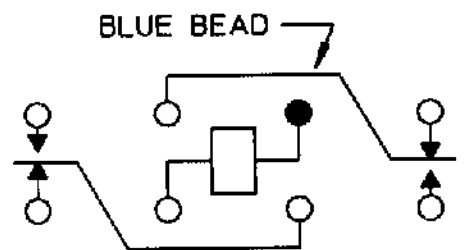

CONTACT RATING: 5 AMPS 30 VDC  
 RESISTIVE 1 AMP 30 VDC INDUCTIVE  
 100,000 OPERATIONS

DR. R.B. 7/9/92 CK: 7/9/92



CUST. HI-G  
 CUST. NO. 28N-2A-126

TYPE FW5A RELAY

FW5A1201S04